


ALLURAVISION™ SERIES ELECTRIC FIREPLACE



Specifications

| Model | BTU | Width | | Height | | Depth | | Viewing Area |
|------------|------|-----------|------------|---------|---------|----------|---------|---------------------|
| | | Actual | Framing | Actual | Framing | Actual | Framing | |
| NEFL42CHD | 9000 | 42 1/16" | 42 9/16" | 15 7/8" | 16 1/8" | 5 13/16" | 6 1/16" | 40 1/4" x 11 1/16" |
| NEFL50CHD | 9000 | 50 5/16" | 50 13/16" | 15 7/8" | 16 1/8" | 5 13/16" | 6 1/16" | 48 1/2" x 11 1/16" |
| NEFL60CHD | 9000 | 60 3/16" | 60 11/16" | 15 7/8" | 16 1/8" | 5 13/16" | 6 1/16" | 58 5/16" x 11 1/16" |
| NEFL74CHD | 9000 | 74 5/16" | 74 13/16" | 15 7/8" | 16 1/8" | 5 13/16" | 6 1/16" | 72 1/2" x 11 1/16" |
| NEFL100CHD | 9000 | 100 5/16" | 100 13/16" | 15 7/8" | 16 1/8" | 5 13/16" | 6 1/16" | 98 1/2" x 11 1/16" |
| NEFL42CHS | 5000 | 42 1/16" | 42 9/16" | 15 7/8" | 16 1/8" | 4 1/4" | 4 1/2" | 40 1/4" x 11 1/16" |
| NEFL50CHS | 5000 | 50 5/16" | 50 13/16" | 15 7/8" | 16 1/8" | 4 1/4" | 4 1/2" | 48 1/2" x 11 1/16" |
| NEFL60CHS | 5000 | 60 3/16" | 60 11/16" | 15 7/8" | 16 1/8" | 4 1/4" | 4 1/2" | 58 5/16" x 11 1/16" |
| NEFL74CHS | 5000 | 74 5/16" | 74 13/16" | 15 7/8" | 16 1/8" | 4 1/4" | 4 1/2" | 72 1/2" x 11 1/16" |

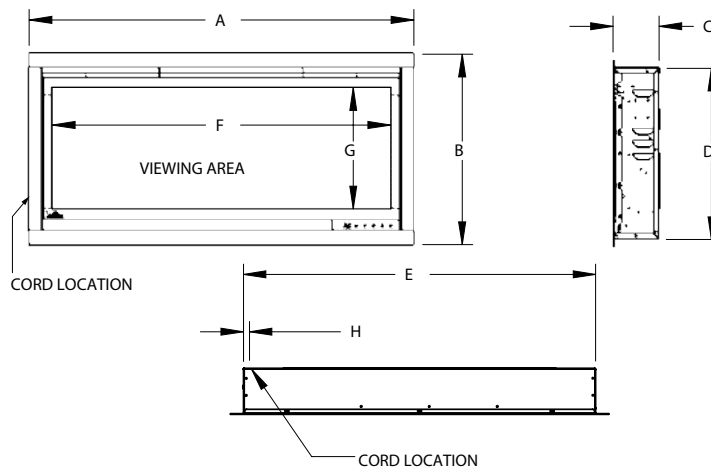


| Dimensions | | | | | | | | |
|------------|-------------------------|--------------------|----------------------|---------------------|------------------------|-----------------------|----------------------|-----------------|
| Model No. | A | B | C | D | E | F | G | H |
| NEFL42CHS | 44 7/16" (112.8cm) | 17 5/16" (44cm) | 4 1/4" (10.8cm) | 15 7/8" (40.2cm) | 42 1/16" (106.8cm) | 40 1/4" (102.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL50CHS | 52 11/16" (133.8cm) | 17 5/16" (44cm) | 4 1/4" (10.8cm) | 15 7/8" (40.2cm) | 50 5/16" (127.8cm) | 48 1/2" (123.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL60CHS | 62 9/16" (158.8cm) | 17 5/16" (44cm) | 4 1/4" (10.8cm) | 15 7/8" (40.2cm) | 60 3/16" (152.8cm) | 58 5/16" (148.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL74CHS | 76 3/4" (194.8cm) | 17 5/16" (44cm) | 4 1/4" (10.8cm) | 15 7/8" (40.2cm) | 74 5/16" (188.8cm) | 72 1/2" (184.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL42CHD | 44 7/16" (112.8cm) | 17 5/16" (44cm) | 5 13/16" (14.8cm) | 15 7/8" (40.2cm) | 42 1/16" (106.8cm) | 40 1/4" (102.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL50CHD | 52 11/16" (133.8cm) | 17 5/16" (44cm) | 5 13/16" (14.8cm) | 15 7/8" (40.2cm) | 50 5/16" (127.8cm) | 48 1/2" (123.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL60CHD | 62 9/16" (158.8cm) | 17 5/16" (44cm) | 5 13/16" (14.8cm) | 15 7/8" (40.2cm) | 60 3/16" (152.8cm) | 58 5/16" (148.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL74CHD | 76 3/4" (194.8cm) | 17 5/16" (44cm) | 5 13/16" (14.8cm) | 15 7/8" (40.2cm) | 74 5/16" (188.8cm) | 72 1/2" (184.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |
| NEFL100CHD | 102 11/16" (260.8cm) | 17 5/16" (44cm) | 5 13/16" (14.8cm) | 15 7/8" (40.2cm) | 100 5/16" (254.8cm) | 98 1/2" (250.2cm) | 11 1/16" (28.1cm) | 3/4" (1.8cm) |

Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.

Clearances Minimum Mantel Clearances

WARNING

- When using paint or lacquer to finish the mantel, the paint or lacquer must be heat resistant to prevent discolouration.

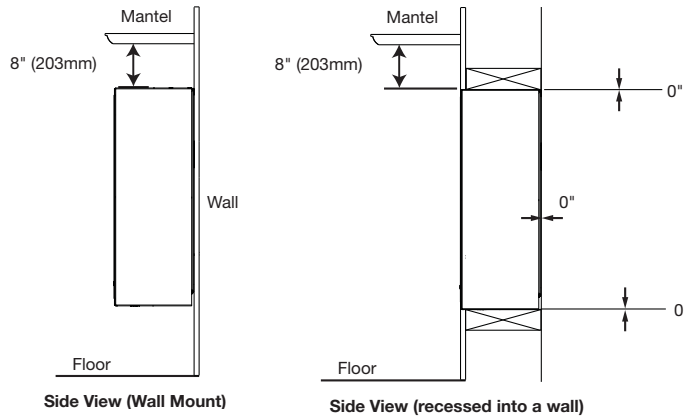

Framing

Measurements from body of appliance:
Sides, Back, Top: 0"

FINISHING MATERIAL

(NON-LOAD BEARING)

4 1/2" [99mm] minimum for CHS models 6 1/16" [152mm] minimum for CHD models


| Model No. | A | B |
|-----------|----------------|---------------------|
| NEFL42CHS | 16 1/8" (41cm) | 42 9/16" (108.1cm) |
| NEFL50CHS | 16 1/8" (41cm) | 50 13/16" (129.1cm) |
| NEFL60CHS | 16 1/8" (41cm) | 60 11/16" (154.1cm) |
| NEFL72CHS | 16 1/8" (41cm) | 74 13/16" (190cm) |

| Model No. | A | B |
|------------|----------------|----------------------|
| NEFL42CHD | 16 1/8" (41cm) | 42 9/16" (108.1cm) |
| NEFL50CHD | 16 1/8" (41cm) | 50 13/16" (129.1cm) |
| NEFL60CHD | 16 1/8" (41cm) | 60 11/16" (154.1cm) |
| NEFL72CHD | 16 1/8" (41cm) | 74 13/16" (190cm) |
| NEFL100CHD | 16 1/8" (41cm) | 100 13/16" (256.1cm) |

Appliance Installation

Side Panel Installation (Wall Mount Installation Only)

- Install left and right panels (FIG. 1) by securing 4 fasteners (2 per panel) to bottom of appliance (FIG. 2).

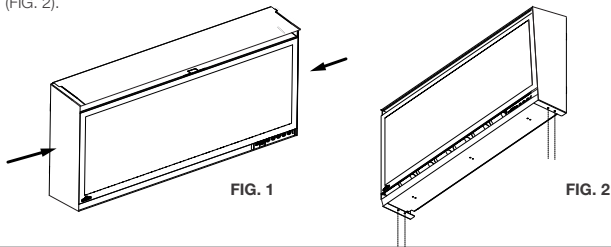


Recessing the Appliance into the Wall


Due to the many different materials used on different walls, it is highly recommended that you consult your local builder before you install this appliance on the wall.

Select a location that is not prone to moisture and is located at least 36" (91.4cm) away from combustible materials such as curtain drapes, furniture, bedding, paper etc.


- Measure the appliance and create a rough in with electrical. The electrical junction box is located on the left side of the appliance.
- Remove the front glass (see "front glass installation and removal" section in your manual).
- Remove the plastic panel holders by removing the screws (FIG. 1 and 2).

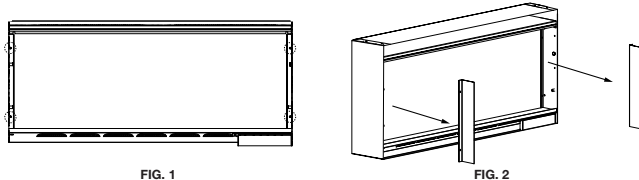

- If side covers are installed prior to recessed installation, remove the side covers by removing the screws (FIG. 3 and 4).

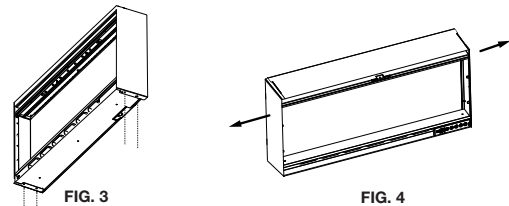

- Install trims (see "trim installation" section in your manual).
- Hold the appliance up to ensure it will fit into the framing (see "framing - recessed installation" section in your manual).
- Apply shims (not supplied) between the appliance and the frame.
- Use 4 screws to secure the appliance into the wall (FIG. 5). Do not over-tighten screws.



- Re-install the plastic panel holders.
- Place the crystals or optional topaz glass chips and drift wood logs (CHD models only) along the media tray (see "crystal ember installation" and "optional topaz glass chips and drift wood log installation" sections in your manual).
- Install front glass (see "front glass installation and removal" section in your manual).

note:

2 sets of holes are provided for recessing into the wall. The wall structure may limit how far the appliance can be recessed. Use the appropriate set of holes when recessing to the frame. Apply shims (not supplied) between appliance and frame.

It is recommended that the walls of the appliance enclosure be finishing (i.e. drywall) to avoid exposed insulation or vapour barrier coming in contact with the appliance. This will ensure clearance to combustibles is maintained.